


Unisto Genius solid

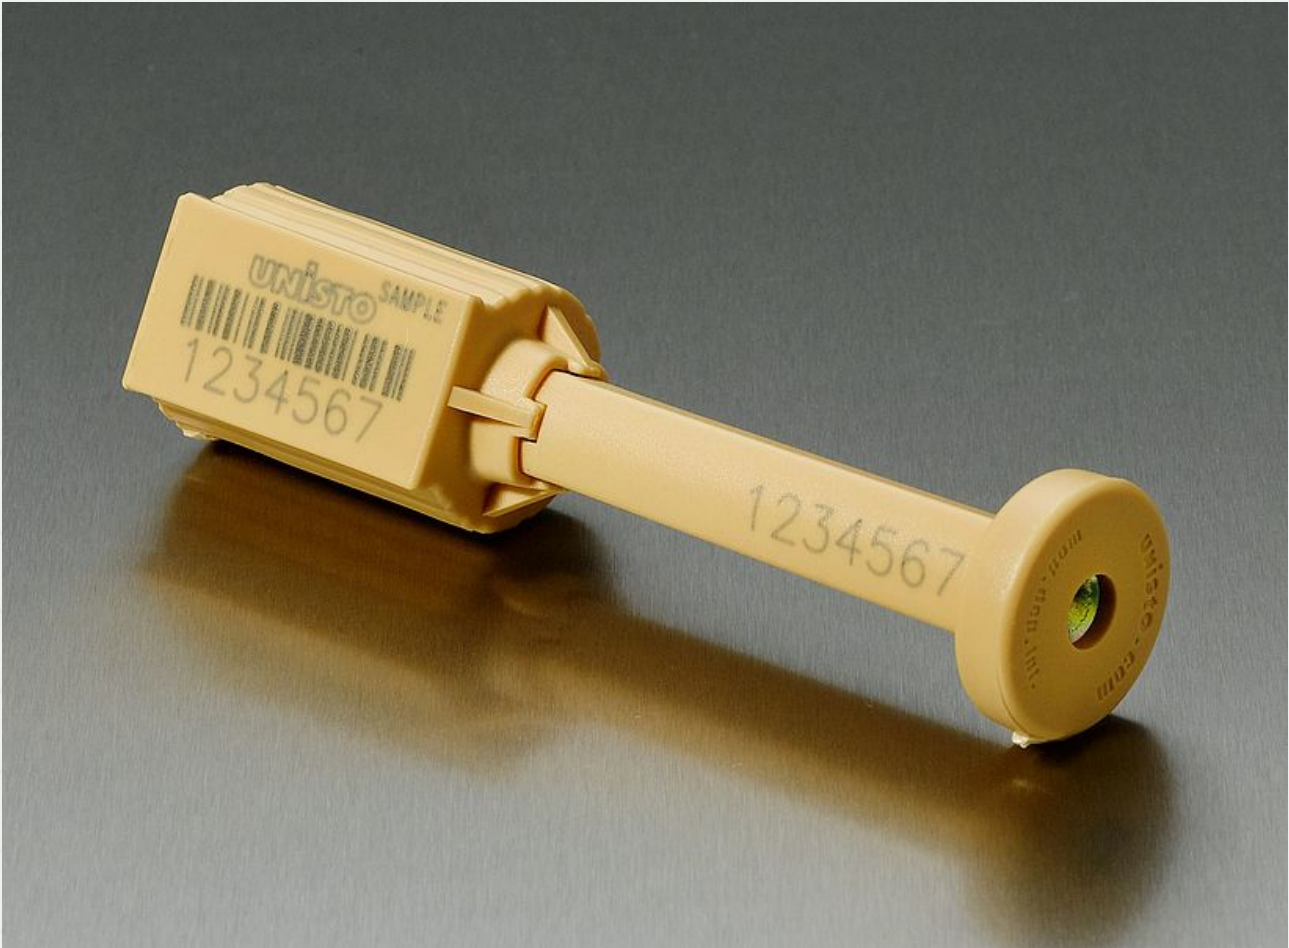

A Barrier Bolt Seal used in industries such as Transport, Retail and Container Cargo Shipments. Unisto Genius Solid for sealing Containers, Trailers and Railway- and Goods Wagons and Truck doors. This Security Seal prevents opportunistic theft. Removal requires a bolt cutter. Available personalised with name/logo for clear identification and streamlining processes. Available in a range of plastic colours.

Features of this security seal


Type of Seal

Bolt Seals

Application

Container

- › Logo can be insert moulded on the top of the pin (optional)
- › 4 Spikes emerge from top of the closure to frustrate any attempt to conceal the evidence of re-attaching the pin
- › Embossed logo and arrows in reverse directions is designed as anti-tampering feature
- › Any attempt to re-attached the pin will distort the embossed arrows and „Unisto“
- › Embossed words and arrows of the pin is difficult to imitate due to complexity of the tool
- › Anti-spin feature
- › Each set is individually packed in a security polybag

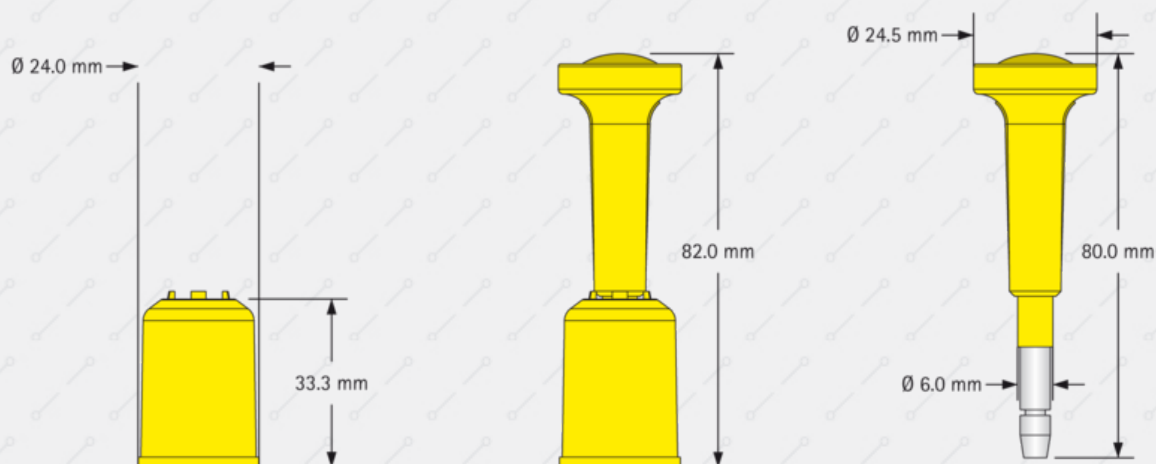

Materials

Bolt: steel, yellow zinc pattern Body and spring: steel Coating Body and pint: Polypropylene (PP) Coating

Tensile strength

Approx. 7.8 kN (800kg)

Numbering

Up to 8 digits

Barcoding

Interleaved 2/5 or Barcode 128
Others on request

Customer name

Serial number and company name directly laser marked on pin and body

Plastic Colours (laser)

blue, yellow, green, white, pink

Packing

10 pieces per tray, 200 seals per carton 20 pieces per box, 200 seals per carton




Storage

Seals should be stored in original box away from direct sunlight and chemical fumes. Store at 22°C/50% RH. Typical shelf life of seals made of PP and PA are approx. 18 months from date of manufacture. Nevertheless please do not order more than an annual quantity.

Packing size

carton	tray type	405 x 210 x 215 mm	9.5kg
	box type	320 x 266 x 190 mm	10.0kg

How to close



How to open

