


Unisto Metalo 15







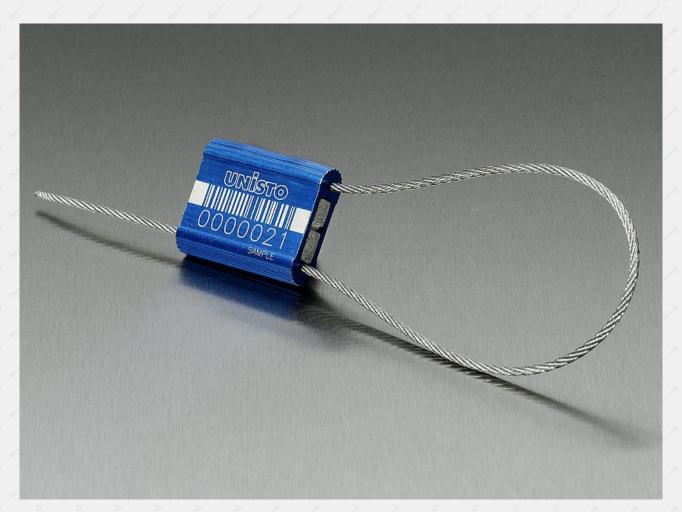

Unisto Metalo 15 to seal calibrators, valves or all applications which request small diameter of the cable. These barrier security seals protect goods from opportunistic attack. Our Security Cable Seals are available in different colours for logistic purposes. Customisable with customer name, number and barcode to make each seal unique which supports and secures logistical processes. Light cutters are required to open the seal.



Features of this security seal

Type of seal


Cable Seals

Application

Container, Doors of Trucks and Trailers

- Unique designed locking mechanism which firmly secures the seal in position to eliminate any possibility of tampering
- Non-preformed cables unravels after cut to prevent multiple re-sealing
- Barrier security seals protect goods from opportunistic attack
- Customer name on seal for clear identification and enhanced security
- Direct laser-marking suited for rough handling and prevents tampering
- Barcoded numbering for fast, accurate reliable data capture and streamlining operations
- Various colours for logistical functions
- Important notice: we recommend wearing protective gloves when attaching and protective gloves and glasses when removing.



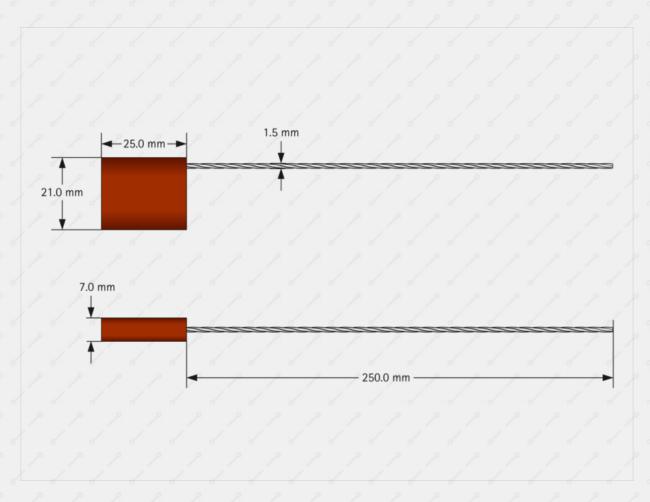

Materials

Seal casing: aluminium alloy. Cable: high quality cable. Locking roller: heat treated carbon steel. Tension spring: heat treated high tensile steel.

Dimensions

Housing: 25 x 21 x 7 mm Cable: diameter 1.5 mm, length 250 mm. Others lenghts on request

Tensile strength (loop)

Approx. 300 kg

Barcode/Number

Directly laser marked barcode 128 - 6 digits Numbered - 6 digits Others on request

Customer name

Directly laser marked

Colours (Housing)

Black, blue, red, green, orange Other colours available on request

Packing

10 seals per bundle, 50 seals per bag, 500 seals per carton for cable length 150mm to 250mm 10 seals per bundle, 50 seals per bag, 250 seals per carton for cable length 260mm to 400mm Seals should be stored in original box away from direct sunlight and chemical fumes.

Packing size

box 315 x 245 x 115 mm